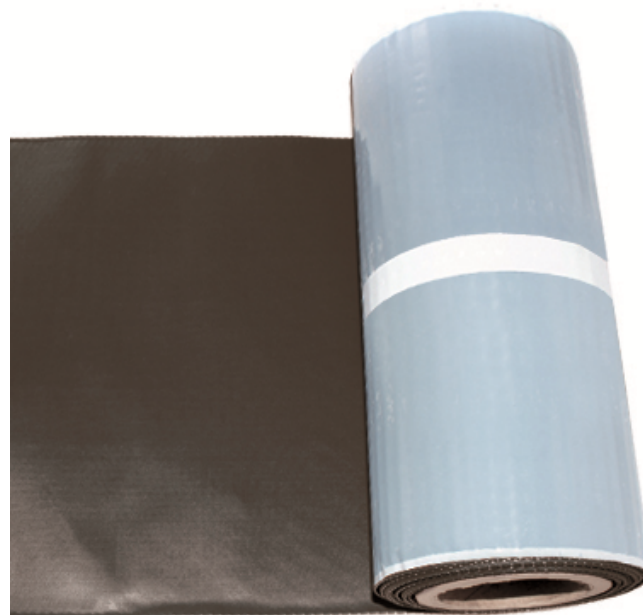


**Technical data sheet****mdm EuroTec EPDM rollable chimney flashing strip**

Characteristic	Unit	Value
Reaction to fire	class	E
Watertightness	10 kPa, met B	Watertight
Tensile properties:		
- in longitudinal direction	N/50 mm	≥ 160
- in transverse direction	N/50 mm	≥ 290
Elongation:		
- in longitudinal direction	%	≥ 48
- in transverse direction	%	≥ 12
Resistance to static loading	kg	≥ 5
Resistance to impact	mm	≥ 200
Tear resistance:		
- in longitudinal direction	N	≥ 55
- in transverse direction	N	≥ 80
Joint shearing strength:		
- transverse overlapping	N/50 mm	≥ 50
- longitudinal overlapping	N/50 mm	≥ 62
Joint stripping strength:		
- in longitudinal direction	N/50 mm	≥ 5
- in transverse direction	N/50 mm	≥ 5
UV exposure	1000 h	Fulfills test requirements
Flexibility at low temperature	°C	≤ -40
Dangerous substances	-	nd

Bielsko-Biała, 30. 09. 2020  
 (place and date)